


**BM ENTERPRISES SRL**



Aluminum  
**Hinge Door**

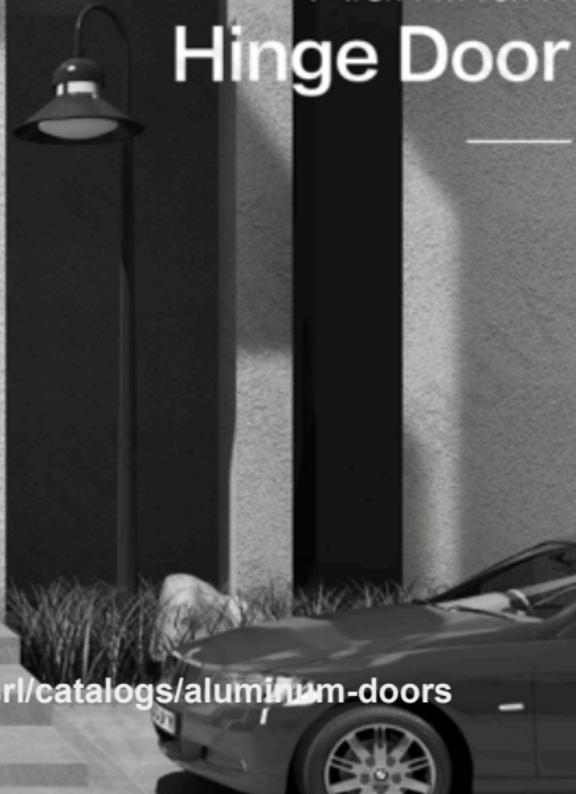

<https://www.catalogmachine.com/bm-enterprises-srl/catalogs/aluminum-doors>

## 115 Series Hinge Door

Material: Aluminum with frame

Door Panel Thickness: 50mm

Door Frame: 115\*75\*50mm with sealing strip fixed width

Trim Color: Customizable with based on wall thickness

Gloss/Shine: Customizable based on design style

Color: Spray painting, paint coating, wood-grain transfer printing

Glass: Customizable glass specifications

Lock Set: ① Standard: A73877000 anti-pry lock; ② Optional: A73877000 integrated three-point lock

Hinges: Push hinge /But hinge /Double-door hinges

Hinge Accessories: ① Surface-mounted hinge ② Surface-mounted hinges installed in a recessed manner ③ Concealed hinge

Threshold: ① Without threshold ② 2500 ③ 7500

Optional Hardware: Knob/handles

Maximum Dimensions: ① Single door: 1250\*3300mm, standard with concealed hinges (surface-mounted hinges need 4 hinge sets)


② Double door: 2300\*3300mm

Door Panel Aluminum Profile Thickness: Custom 3mm-20mm (standard: 4mm)

Internal Filling: ① Polyurethane fire-resistant board ② Aluminum honeycomb

Filling Function: Thermal insulation, soundproofing, and fire resistance

Door Frame: Integrated welding, detachable assembly available (Ensure compliance with the maximum container loading dimensions).

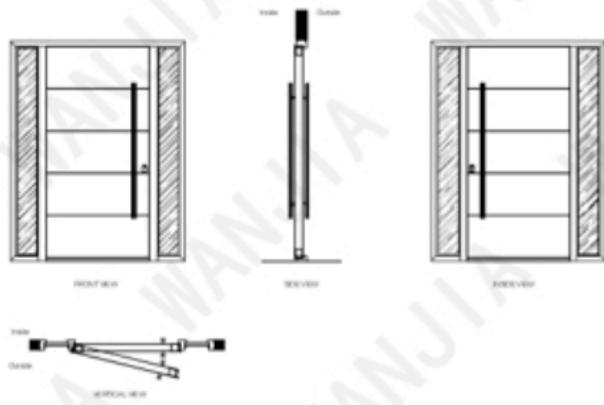

## 100 Series Hinge Door

Material: Aluminum with frame

Door Panel Thickness: 8mm

Door Frame: 100x100x30mm multi-cavity structure with sealing strip (fixed width)

Frame Cover: Customizable with glass or metal thickness

Craftsmanship: Customizable based on design styles

Color: Spray painting, paint coating, wood grain transfer printing

Glass: Customizable glass specifications

Lock Set: 1: Standard 40\*388\*7008 anti-pry lock; 2: Optional integrated three-point lock (40\*388\*7008)

Hinges: Unique hinge / Butt hinge / Double door hinge

Hinge Accessories: T-Surface-mounted hinges; Z-Consolidated hinges

Threshold: 1: Without threshold 15; 2: 3520; 3: 6550

Optional Hardware Accessories: Knobs/Handles

Maximum Dimensions: 1: Single door: 900\*2500mm, standard with concealed hinges (surface-mounted hinges need 24 hinge);


2: Double door: 1800\*2500mm

Door Panel Aluminum Profile Thickness: Colorful 3mm~6mm (Standard 3mm)

Internal Filling: 1: Polyurethane fire-resistant board; 2: Aluminum honeycomb

Filling Function: Thermal insulation, soundproofing, and fire resistance

Door Frame: Integrated welding (non-detachable assembly); fixed glass panels can be added on both sides (Ensure compliance with the maximum container loading dimensions.)

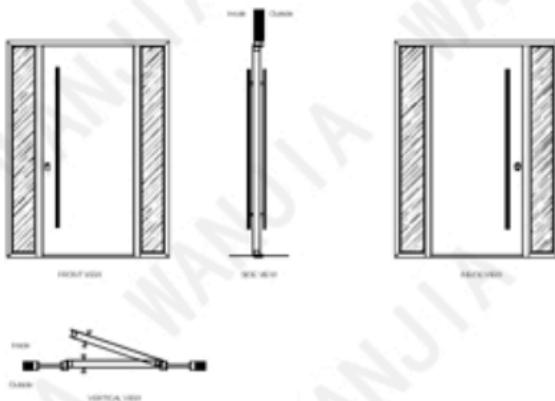

## 100 Series Thermal Break Hinge Door

Material: Thermal break aluminum (with frame)

Door Panel Thickness: 10mm

Door Frame: 100/85/103mm with sealing strip and fixed with Trim Cover. The width can be customized according to the wall thickness.

Craftsmanship: Custom craftsmanship based on the style

Glass: Spraying, painting, wood grain transfer printing

Glass: Custom glass specifications

Lock Set: 1. T 247/248/2088 lock set (standard) 2. 247/240/7000 integrated three-point lock

Hinge: Standard thermal break hinge fittings

Opening: Single / Double Maximum 120-degree opening

Threshold: 1. Without threshold 2. 3010 3. 2050


Optional Hardware/Accessories: Handles/Knobs

Door Panel Aluminum Plate Thickness: 3mm~10mm Thick aluminum plates are available as an option. The standard default is 4mm plate.

Intercalating: 1. Polyurethane wax fire-resistant board 2. Aluminum honeycomb

Filling Function: It provides certain thermal insulation, soundproofing, and fire-resistant properties.

Door Frame: 1. Integrated sealing. It can neither disassembled or assembled. Please check if it can be loaded in the container.

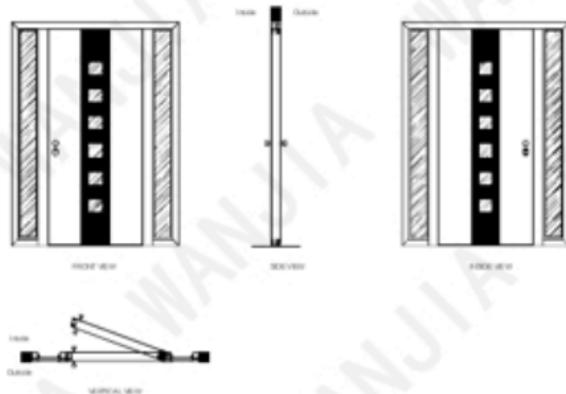

100 concealed hinge for thermal break system door weight capacity 100KG, and the opening angle 120-degrees.





Aluminum  
**Pivot Door**

---



HD-01



HD-02



HD-03



HD-04



HD-05



HD-06



HD-07



HD-08



HD-09



HD-10



HD-11




HD-12



HD-13



HD-14

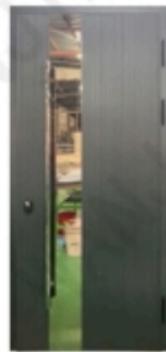

HD-15



HD-16




HD-20



HD-21



HD-22



HD-17



HD-18



HD-19



HD-23



HD-24



HD-25



HD-26



HD-27



HD-28



HD-32



HD-33



HD-29



HD-30



HD-31



HD-34



HD-35



HD-36



HD-37



HD-38



HD-39



HD-40



HD-41



HD-42

## 100 Series Pivot Door

Materials: Aluminum/Steel

Door Panel Thickness: 10mm

Door Frame: 100/75/4.7mm sealing strips on both sides of the door frame. Fixed with hidden dust-proof strips at the top and bottom.

Skin Cover: The width can be customized according to the wall thickness.

Craftsmanship: Custom craftsmanship based on the style

Glass: Spraying, painting, wood grain transfer printing

Glass: Custom glass specifications

Lock Set: (1) 30\*38\*70mm lock set (standard) (2) 35\*38\*70mm integrated three-point locking system

Pivot Spring: Dama/ANH/Domestic

Opening: Single/Double (90-degree inward/outward opening, 180-degree inward/outward opening)

Threshold: (1) Without threshold 15mm (2) 50mm

Optional Hardware/Accessories: Handles/Knobs


Minimum Width: 1250mm width

Door Leaf: Aluminum Plate Thickness: 3mm~20mm Thickness plate are available, with the standard default being aluminum plate.

Internal Filling: (1) Polyurethane fire-resistant board (2) Aluminum honeycomb

Filling Function: Provides certain thermal insulation, soundproofing, and fire-resistant properties.


Door Frame: (1) Integrated welding (2) Modular Process (For oversized products, the outer frame can be disassembled and assembled on-site)



INSOLE VIEW



SIDE VIEW



INTERNAL VIEW



VERTICAL VIEW



German Style 30kg  
Floor Spring



German Style 50kg  
Floor Spring



30kg Pivot Door Hinge  
with Holding Shaft (inflatable)



Hinge for above 30kg Pivot Door (threshold)



NH10 Accessory



NH10 Accessory



NH10 Pivot Door Hydraulic  
Hinge 200kg



NH10 Hydraulic Hinge



Pivot Door Automatic Dust Strip (slanted design)



Pivot Door Automatic Dust Strip (straight design)

## 100 Series Thermal Break Pivot Door

Materials: Thermoflatness aluminum and frame/edges

Door Panel Thickness: 10mm

Door Frame: 100/147/39mm sealing strip on the both sides of the door frame. Fitted with hidden dust-proof strips at the top and bottom.

Frame Cover: The width can be customized according to the wall thickness.

Craftsmanship: Custom craftsmanship based on the style

Gates: Spraying, painting, wood grain transfer printing

Glass: Custom glass specifications

Lock Set: 1. 24" 395\*708 Single lock set (standard) 224\*395\*708 Integrated three-point lock

Pivot Spring: Dornoff NHN-Domeatic-Guchi Furusawa

Opening: Single/Double, 90-degree inward / outward opening

Threshold: 1. Without threshold 10mm; 2. 50mm

Optional Hardware (Accessories): Handles/Hooks


Minimum Width: 1250mm width

Door Panel Aluminum Plate Thickness: 3mm~10mm Thickness (plate area available, with the standard default being 4mm plate)

Internal Filling: ① Polyurethane fire-resistant board ② Aluminum honeycomb

Filling Function: Provides certain thermal insulation, soundproofing, and fire-resistant properties.

Door Frame: ① Integrated welding ② Modular Process (For oversized products, the outer frame can be disassembled and assembled on-site)



NHN Accessory



NHN Accessory



NHN Pivot Door Hydraulic Hinge 300kg



NHN Hydraulic Hinge



Pivot Door Automatic Dust Strip (silent design)



Pivot Door Automatic Dust Strip (silent design)



Hinge Fixation 300kg Pivot Door (silenced)



PD-01



PD-02



PD-03



PD-04



PD-05



PD-06



PD-07



PD-08



PD-09



PD-12



PD-13



PD-10



PD-11



PD-14



PD-15



PD-16



PD-17



PD-20




PD-21



PD-22



PD-18

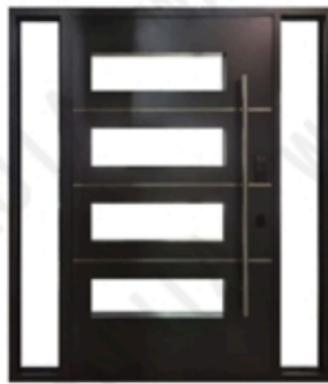

PD-19



PD-23



PD-24



PD-25




PD-26



PD-27



PD-28

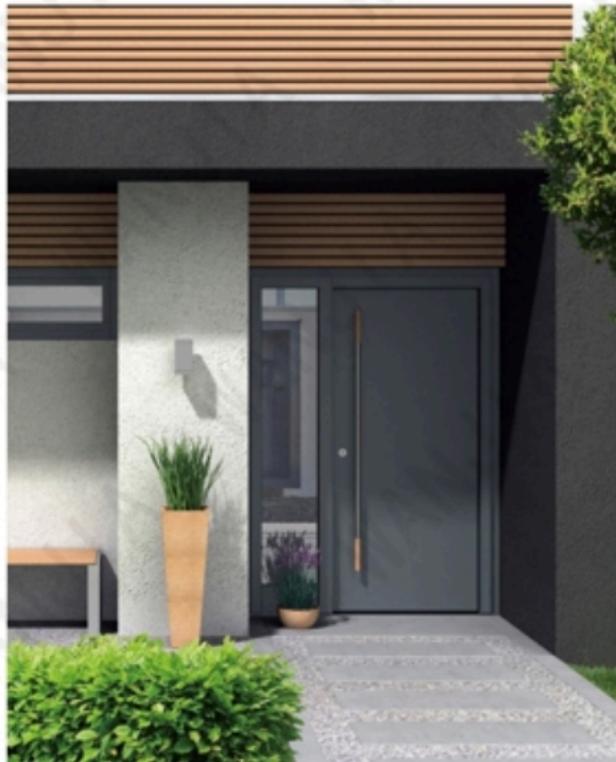

PD-29





EC-01



EC-02



EC-03



EC-07



EC-08



EC-09



EC-04



EC-05



EC-06



EC-10



EC-11



EC-12

# BM ENTERPRISES SRL

Términos y Condiciones de Mayorista

[bmenterprisesrd@gmail.com](mailto:bmenterprisesrd@gmail.com) 829.551.1280 Whatsapp 561.542.9758

Pedido Mínimo: Todos los pedidos al por mayor deben cumplir con un monto mínimo de \$1,000 USD. Condiciones de Pago: Se requiere un depósito del 20% al momento de realizar el pedido.

El saldo restante debe pagarse en su totalidad antes de la entrega. Responsabilidad y Limitaciones: El mayorista no es responsable por la pérdida de mercancía debido a pérdidas accidentales. El mayorista no es responsable por defectos o daños en los productos una vez aceptados por el comprador. El mayorista no es responsable del transporte ni de la entrega de la mercancía. Opción de Entrega: En caso de que el mayorista acepte organizar la entrega, el comprador entiende que esto implicará costos adicionales.: Derechos de Importación e Impuestos. Si se aplican derechos o impuestos adicionales, será responsabilidad exclusiva del comprador cubrir dichos cargos.

Código	Descripción	Cantidad	Precio